




IP67 box version (on request)



4+2 PVC fittings for sheath

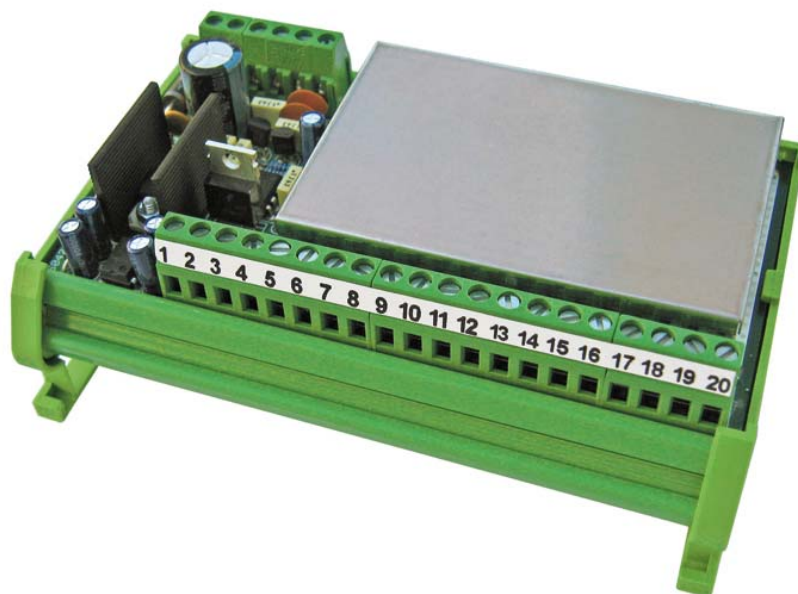

CODE

Analog output and calibration by the customer

JOLLYTPS

Analog output

TPS

DESCRIPTION

- Analog weight transmitter suitable for back panel mounting on Omega/DIN rail or junction box (on request).
- Dimensions: 123x90x65 mm.

INPUTS/OUTPUTS AND COMMUNICATION

- Current or voltage 16 bit analog output.
- 4 load cell dedicated inputs.

MAIN FUNCTIONS

- Connections to:
 - PLC via analog output.
 - max. 6 load cells in parallel by junction box.
- Ideal for use with analog/digital boards normally installed on PLC.
- Ability to reset the tare and get the maximum output value up to 1/6 of full scale.
- Analog filter to reduce the effects of weight oscillation.
- Calibration with sample weights or load cell simulator.
- Tare weight zero setting.

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47

Казахстан (772)734-952-31

Таджикистан (992)427-82-92-69

TECHNICAL FEATURES

Power supply and consumption	24 VDC $\pm$ 15%; 6 W
Number of load cells • Load cells supply	up to 6 (350 Ω) - 4 wires • 10 VDC/180 mA
Linearity	0.01% full scale
Thermal drift	0.005% full scale/°C
Measure range	3-24 mV
Analog filter (10÷90%)	100÷1000 ms
Analog output	current: 0÷20 mA cc; max 400 Ω current: 4÷20 mA cc; max 400 Ω voltage: 0÷10 VDC; min 2000 Ω
Humidity (condensate free)	85%
Storage temperature	-20 °C +70 °C
Working temperature	-10 °C +50 °C

CALIBRATION

Coarse zero (zero setting selection)	4 dip-switches from 0-17 mV
Zero fine (zero position adjustment)	10-turn potentiometer trimmer, 10% range
Coarse full scale	4 dip-switches from 3-24 mV (1/6 full scale)
Fine full scale	10-turn potentiometer trimmer, 10% range

OPTIONS ON REQUEST

	DESCRIPTION	CODE
	IP67 polycarbonate waterproof box 170x140x95 mm (4 fixing holes Ø4 mm; centre distance 152x122 mm).	
	- transparent lid	CASTL
	- transparent lid; 4+2 M16x1.5 cable glands - plugs	CASTLPG9
	- transparent lid; 4+2 PVC end-fittings for sheath	CASTLGUA

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395) 279-98-46

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47

Казахстан (772)734-952-31

Таджикистан (992)427-82-92-69

Эл. почта mfd@nt-rt.ru || Сайт: <https://laumas.nt-rt.ru/>