

TAIPAN265

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

TAIPAN265

LOSS-IN-WEIGHT WEIGHING SYSTEM

LAUMAS®



DESCRIPTION

- Loss-in-weight regulator in DIN box suitable for front panel mounting.
- Dimensions: 144x72x120 mm (drilling template: 139x67 mm)
- Backlit LCD display, two-line by 16-digit (5 mm height).
- Protective fuse accessible from the outside.

On request:

- PROFIBUS protocol (it needs additional module).
- Separate module for an additional analogue input and output.
- ETHERNET interface module.
- 24 column printer.


MAIN FUNCTIONS

- Maintaining the set point flow by adjusting IP analog output, with an alarm output of flow out of tolerance.
- Continuous transmission of the instantaneous flow rate, detected by analog output proportional to it.
- Ability to set, for batching, the values of preset, set and fall with pulse outputs to the achievement of values.
- Calculation of total weight of the batched material and transmission through pulse output; ability to drive a printer via RS232.
- Programming of up to 15 different set points of work, settable by BCD inputs.
- Ability to freeze the analog output value by means of logic input, in order to avoid the initial pendulation of system (for all 15 set point).
- Ability to display, during operation, I/O status, the current weight, current speed, encoder pulses and the correction factor set
- Possibility to connect to PC/PLC by means communication protocols: ASCII, Modbus RTU and Profibus (on request).

INPUTS/OUTPUTS AND COMMUNICATION

- 1 RS232/RS422/RS485 serial output (9-pin female connector) for communication via ModBus RTU, Profibus DP, ASCII protocols.
- 6 relay outputs.
- 8 optoisolated PNP digital inputs.
- 1 load cell dedicated input.
- Current or voltage 16 bit analog output.

APPLICATION DIAGRAM

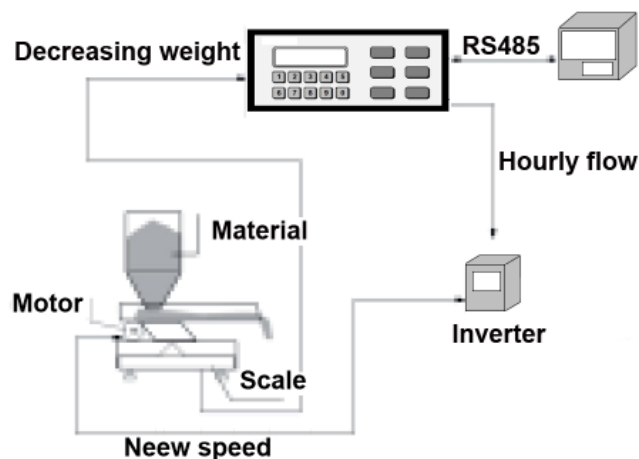

TECHNICAL FEATURES

Power supply and consumption	230/115 VAC 50-60Hz ; 15 VA
Number of load cells • Load cells supply	up to 6 (350 Ω) a 4/6 wires • 5 VDC / 90 mA
A/D Converter	24 bit
Measurement range	±3.9 mV/V
Display resolution	60000
Internal resolution	16000000
Display increments	x1 x2 x5 x10
Relay outputs	6 - max 115 VAC / 30 VDC / 0.5 A each
Optoisolated digital inputs	8 - 12/24 VDC PNP
Serial ports	COM1: RS232c half duplex; COM2: RS422/RS485 half duplex
Baud rate	9600 (bit/s)
Analog output	16 bit. 0÷20 mA; 4÷20 mA (up to 300 Ω) 0÷10 V; 0÷5 V (min 10 kΩ)
Encoder supply	12 VDC
Encoder input	single phase push-pull max. 2 kHz
Humidity (condensate free)	10÷90%
Storage temperature	-20 °C + 70 °C
Working temperature	-10 °C + 50 °C

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93